


Butt Closure

TELECOM OUTSIDE PLANT

- The Pedcap butt closure is a general purpose product designed for a variety of applications in distribution networks
- One piece end cap with heat-shrinkable outlet for sealing onto the cables
- Provides an excellent environmental and mechanical seal for telephone splices in the distribution network
- Suitable for use as an overhead, underground or pedestal joint closure in both new construction and maintenance applications.
- Accommodates cables ranging from 2 to 100 pairs and 3-out cable configurations
- Versatile branch off system
- Unlimited shelf life

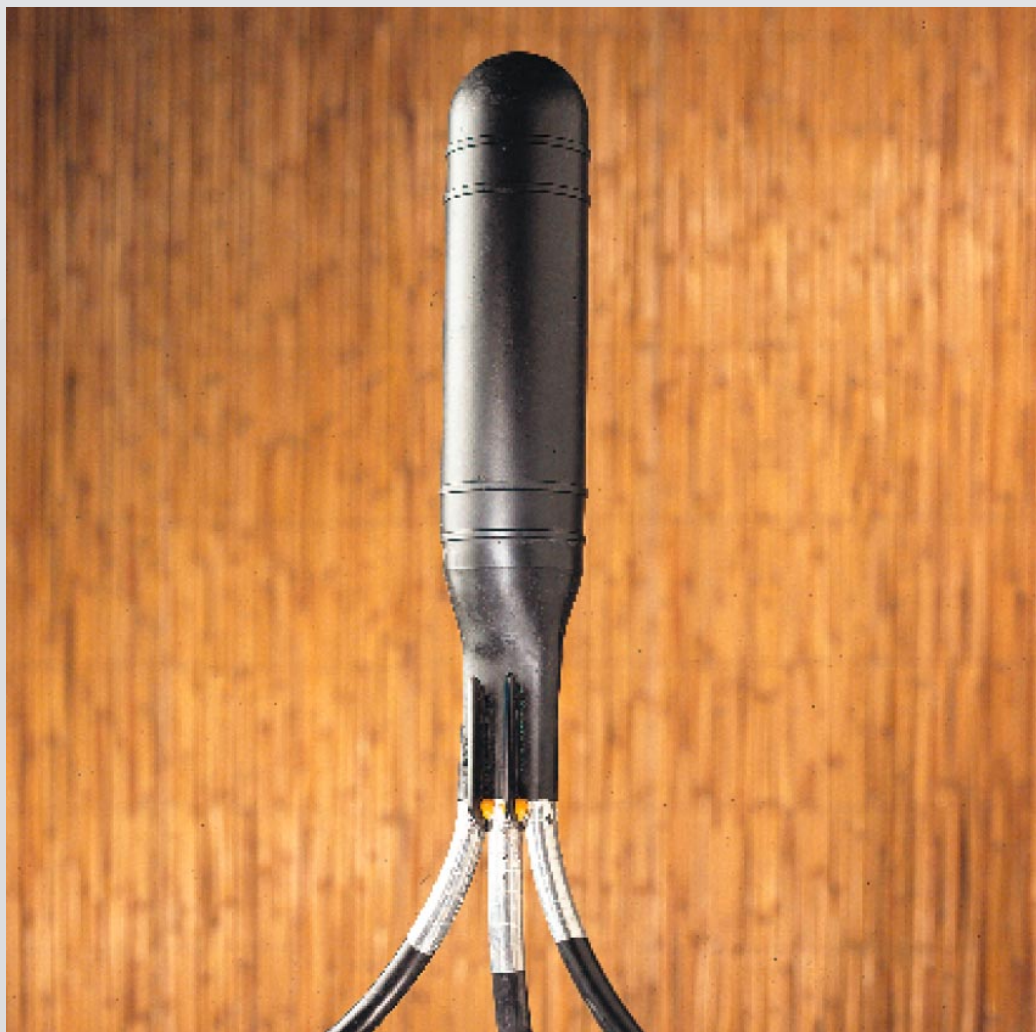


P E D C A P

PEDCAP

Sizing/ordering information

Dimensions (mm)

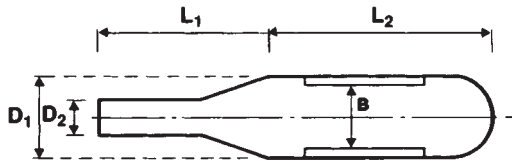


Description	Length		Max. Joint diam. B	Max. diam. D1 (as supplied)	Min. cable D2 (as recovered)
	L1	L2			
Pedcap R1	115	150	35	38	10
Pedcap R2	120	335	50	57	27
Pedcap R4S	175	255	84	95	30
Pedcap R4L	175	375	84	95	30

Kit content



The Pedcap kit includes all accessories to seal joints up to 3 cables out

Re-closure kit

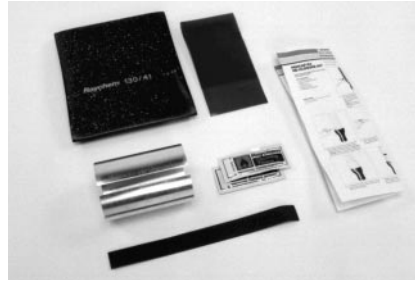

Re-closure kits ordering information

Pedcap R, 2-R: re-entry kit for Pedcap R2
Pedcap R4-R: re-entry kit for both Pedcap R4S
and R4L

Pedcap re-entry

A re-entry kit is available for Pedcap sizes R2 and R4, allowing re-use of the complete Pedcap kit.

Tyco Electronics Raychem NV Telecom Outside Plant

Diestsesteenweg 692
3010 Kessel-Lo, Belgium
Tel.: 32-16 351 011
Fax: 32-16 351 697
www.tycoelectronics.com

Tyco and PEDCAP are trademarks.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, Tyco Electronics makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. Tyco Electronics' obligations shall only be as set forth in Tyco Electronics' Standard Terms and Conditions of Sale for this product and in no case will Tyco Electronics be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of Tyco Electronics products should make their own evaluation to determine the suitability of each such product for the specific application.

TC 061/DS/3 04/97